

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 November 2003 (06.11.2003)

PCT

(10) International Publication Number
WO 03/092294 A1

(51) International Patent Classification⁷: H04N 7/26

(21) International Application Number: PCT/IB03/01564

(22) International Filing Date: 16 April 2003 (16.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02/05087 23 April 2002 (23.04.2002) FR

(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BOURGE, Arnaud [FR/FR]; 156, boulevard Haussmann, F-75008 Paris (FR).
JUNG, Joël [FR/FR]; 156, boulevard Haussmann, F-75008 Paris (FR).

(74) Agent: VAN OUDHEUSDEN-PERSET, Laure; Société Civile SPID, 156, boulevard Haussmann, F-75008 Paris (FR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: DIGITAL IMAGE PROCESSING METHOD FOR LOW-RATE APPLICATIONS

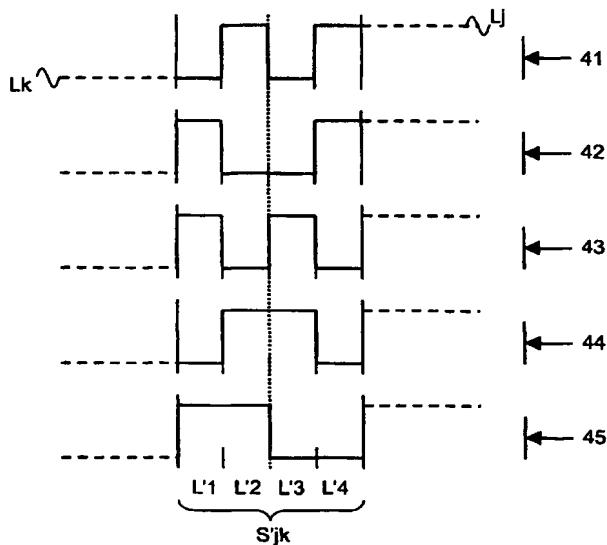

WO 03/092294 A1

(57) Abstract: The present invention relates to a method of processing digital images (30) comprising data blocks, said method including a step of determining (31) a homogeneous region containing two adjacent blocks (Bj, Bk) whose continuous components (Lj, Lk) differ by a value lower than a predetermined threshold. It also includes a step of determining (32) a segment to be corrected (S'jk) which comprises a set of initial data on either side of a border separating the adjacent blocks. The method finally comprises a step of replacing (33) the set of initial data of the segment to be corrected by a set of corrected data (S'jk) chosen at random from various possible corrected data sets (34), an average value of a corrected set of data being substantially equal to an average value of the continuous components of the two adjacent blocks.